


# FlexShaft™ Machines Clears From 1¼" to 4" Drain Line



NEW RIDGID FlexShaft machines are lightweight, compact and highly efficient machines that deliver wall-to-wall clean in  $1\frac{1}{4}$ " to 4" drain lines up to 70'. FlexShaft machines can also be operated while an inspection camera is in the line, letting you see while you clean. No other soft blockage expert can do that.

- Wall-To-Wall Clean: Chain knockers expand for full pipe cleaning
- Simultaneous Camera Use: FlexShaft machines let you keep your camera in-pipe while you work
- Increase Productivity: Faster setup and cleanup, quick cleaning, and cordless convenience for additional time savings
- Customize Your Machine: A full range of chain knockers and accessories are available

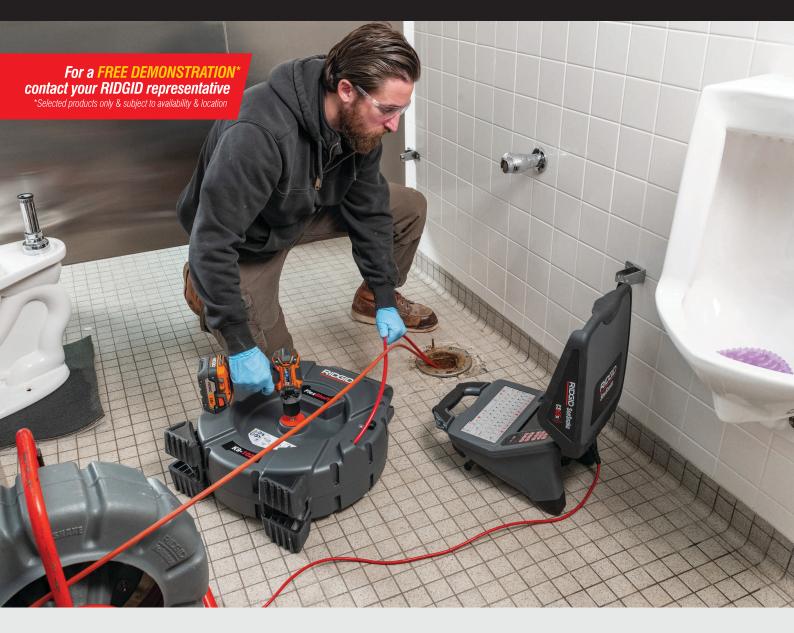





### **CONNECT WITH US**









RIDGID®FlexShaft machines utilize specialized chain knockers attached to a flexible cable that are spun at high speeds by a cordless drill attached to the center drive shaft. Since the cable spins inside a durable nylon sheath that is housed within a fully contained drum, there is less jobsite mess.





# **SPECIFICATIONS**

• Model	K9-102	. K9-204
Drain Capacity (Nom.)	11/4" to 2" (32 – 50mm)	. 2" to 4" (50 – 100mm)
Cable Diameter (without Sheath)	1/4" (6mm)	. 5/16" (8mm)
Cable Assy. Diameter (with Sheath)	. 3/8" (9.5mm)	. 1/2" (12.7mm)
Cable Assembly Length	. 50' (15.2m)	. 70' (21.3m)
Rotational Speed	Maximum 2500 RPM	Maximum 2500 RPM
Drill Attachment	5/16" Hex (8mm)	. 5/16" Hex (8mm)
Weight (without Drill/Knocker)	24.3 lbs. (11.0kg)	. 37.3 lbs. (16.9kg)
Dimension (without Drill)	19.2" x 7.5" x 22.1"	21.1" x 10.8" x 24.2"
	(488mm x 191mm x 562mm)	. (536mm x 274mm x 615mm)
Operating temperature	20°F to 140°F (-6°C to 60°C)	. 20°F to 140°F (-6°C to 60°C)

# ORDER INFORMATION

CATALOG NO.	MODEL NO.	DESCRIPTION	WEIGHT (lb. <b>(</b> kg)(kg)
64268	K9-102	FlexShaft, 11/4"-2" Pipes Includes: 50' 1/4" cable and kit*	29.5 13.4
64278	K9-204	FlexShaft, 2"- 4" Pipes Includes: 70' 5/16" cable and kit**	43.5 19.7

<sup>\*</sup> K9-102 includes: K9-102 11/4" & K9-102 2" Knockers, FlexShaft 4 oz Lubricant, PVC 11/4" & PVC 11/2" Attachments, Hex Key 4mm T-handle Tool, Hex Key 3mm T-handle Tool, RIDGID Tool Bag, K9-102 & K9-204 Manual Pack, Sheath Stock.



Chain Knockers All pipe types · For soft blockages and grease

# ORDER INFORMATION

CATALOG NO.	DESCRIPTION	
64283	FlexShaft Knocker, 1/4" cable, 11/4"-2" pipe, single chain, carbide tip	
64288	FlexShaft Knocker, 1/4" cable, 2" pipe, 2 chain, carbide tip	
64293	FlexShaft Knocker, 1/4" cable, 11/4"-2" pipe, single chain	
64298	FlexShaft Knocker, 1/4" cable, 2" pipe, 2 chain	
64308	FlexShaft Knocker, 5/16" cable, 2" pipe, 2 chain, carbide tip	
64313	FlexShaft Knocker, 5/16" cable, 3" pipe, 3 chain, carbide tip	
64318	FlexShaft Knocker, 5/16" cable, 4" pipe, 3 chain, carbide tip	
64323	FlexShaft Knocker, 5/16" cable, 2" pipe, 2 chain	
64328	FlexShaft Knocker, 5/16" cable, 3" pipe, 3 chain	
64333	FlexShaft Knocker, 5/16" cable, 4" pipe, 3 chain	
64338	RIDGID FlexShaft Lubricant, 8 oz, 12 per case	
64343	FlexShaft 1/4" Assembly, 50' cable, sheath, couplings	
64348	FlexShaft 5/16" Assembly, 70' cable, sheath, couplings	



Carbide Tipped Chain Knockers Hard walled pipes

· For soft blockages, grease, scale and roots

### RIDGID.COM/FLEXSHAFT



Ridge Tool (Australia) Pty Ltd ABN 96 008 446 482 • 127 Metrolink Circuit Campbellfield Victoria 3061 Phone 1800 743 443 Fax 1800 801 976 Email ridgid.australia@emerson.com Web www.ridgid.com.au

<sup>\*\*</sup> K9-204 includes: K9-204 2" & K9-204 4" Knockers, FlexShaft 4 oz Lubricant, Hex Key 4mm T-handle Tool, Hex Key 3mm T-handle Tool, RIDGID Tool Bag, K9-102 & K9-204 Manual Pack, Sheath Stock.