


TO INSTALL NEW STRAP ON No. 1, No. 2, No. 2-P, No. 5 or No. 5-P.

1. Remove pin using punch and hammer.
2. Position handle and strap as illustrated.
3. Insert pin through the wrench head and the loop of the strap.

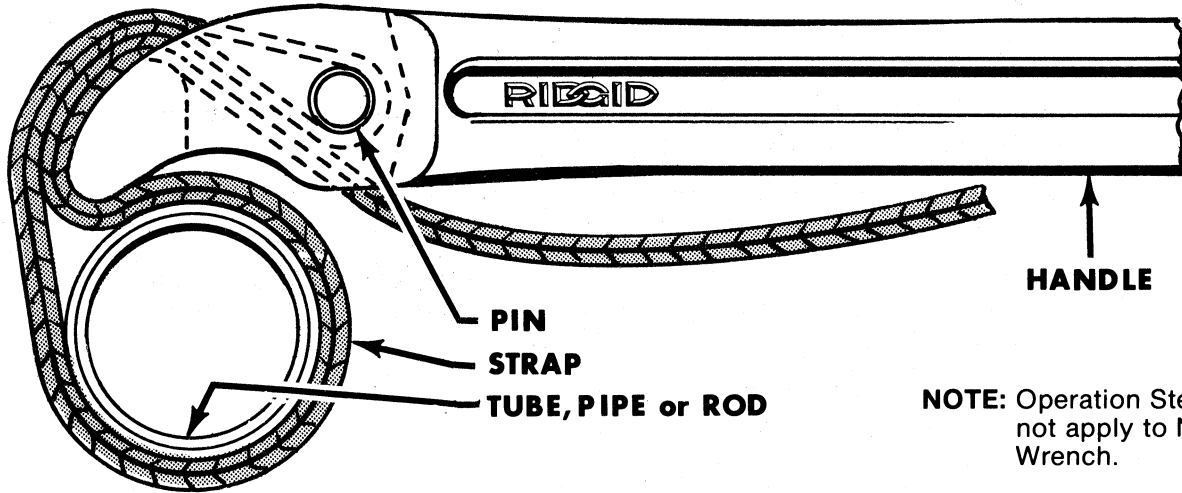

NOTE: Operation Step 3 does not apply to No. 2-P or 5-P Wrench.

OPERATION

1. Wrap strap around workpiece as illustrated.
2. Strap and tube should be free of grease and oil.
3. Apply powdered rosin to strap occasionally.
4. Do not apply rosin to No. 2-P or 5-P wrench strap.



Strap Wrenches Safety Information

Read the following safety information for your protection against serious eye and back injuries.

- Do not slip a piece of pipe over the handle to gain added leverage. Handle may break or the strap may slip.
- Replacement straps should be intended for use with strap wrench. Use of other types of straps may change the performance of the wrench or break.
- Do not use the handle as a lever. Handles may break.

The Ridge Tool Co., Elyria, Ohio, U.S.A.

Printed in U.S.A.



Ridge Tool Subsidiary
Emerson Electric Co.

®

Form No. SW-I-789
999-998-516